



# FPS-30 REPAIR SYSTEM



## FIRE RESISTANT REPAIR SLEEVE

USE OVER A SHRINK SLEEVE TO PROVIDE FIRE PROTECTION OR AS FIRST RESPONSE TO LEAK REPAIR OR CORROSION PROTECTION

FPS-30 is approved to be used over shrink sleeves to provide fire resistance of \*650°C for 30 minutes, maintaining a leak free seal



*Approved to GIS LC8 for use internally and externally on risers and laterals on multi-occupancy buildings*



### FEATURES

- Compliant with BS1775, appendix a
- Approved to British GIS LC8 Standard
- 30 min fire protection up to 650°C
- Can be used over an existing shrink sleeve
- Single Person Application
- Suitable for Internal and External Application
- Cost Effective vs Replacement
- Bespoke Design Service Available

### APPLICATIONS


- Gas
- Low Pressure 75 mbar

### PIPE MATERIALS

- Steel
- Copper
- Cast Iron
- Ductile Iron

\*for low pressure repairs



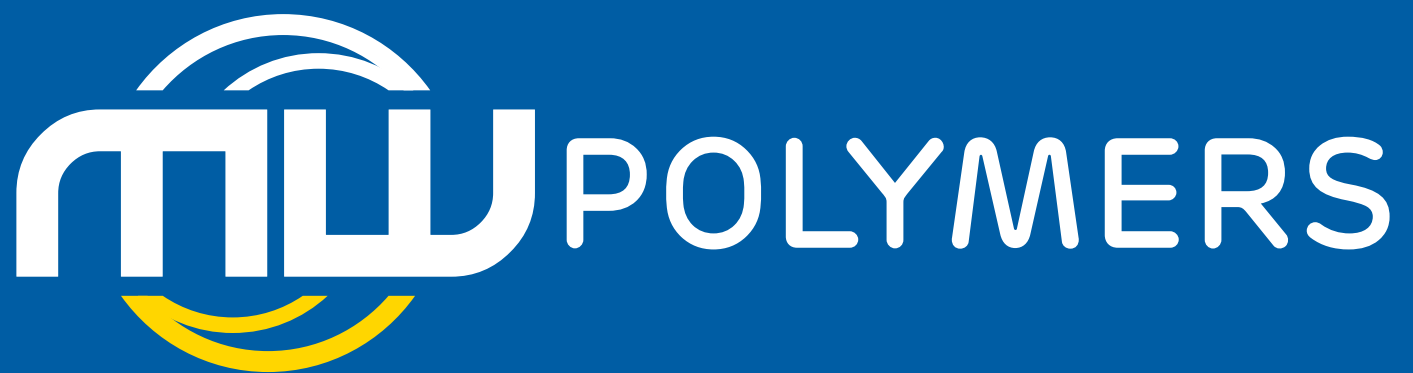

## FPS-30 REPAIR SYSTEM

